

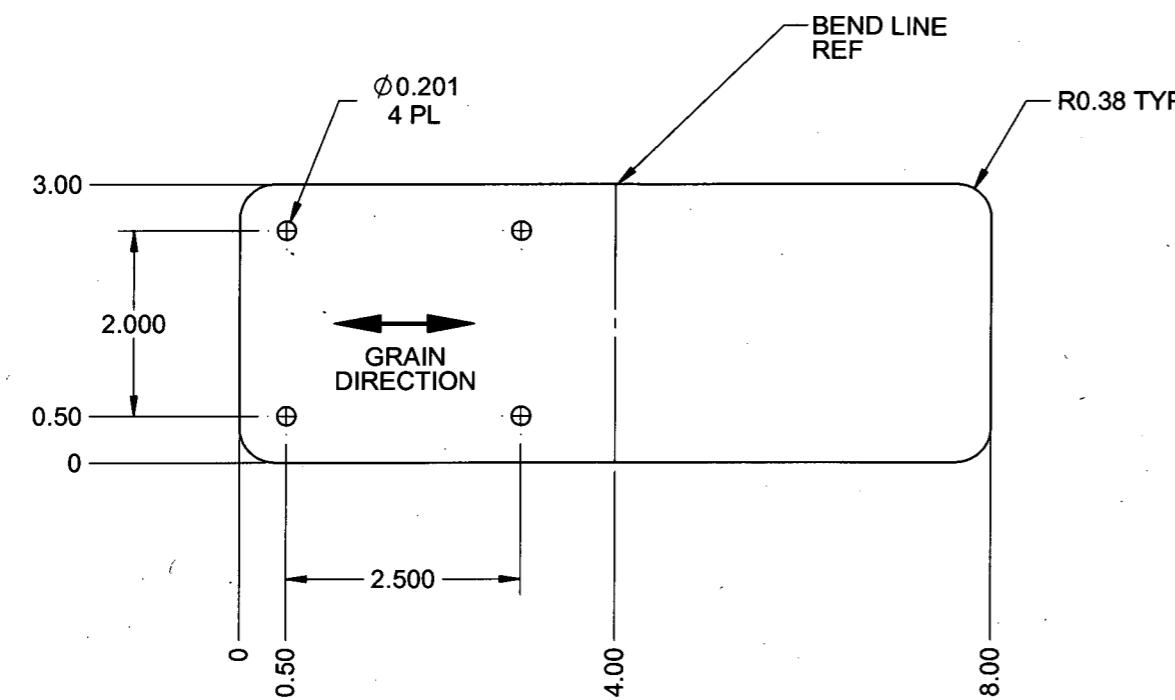
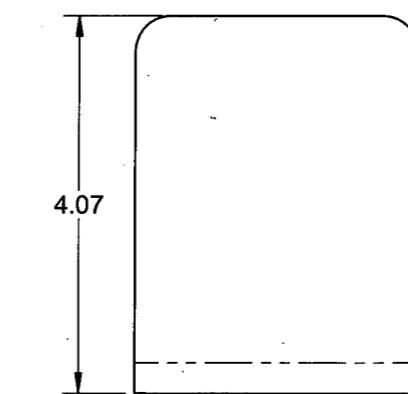
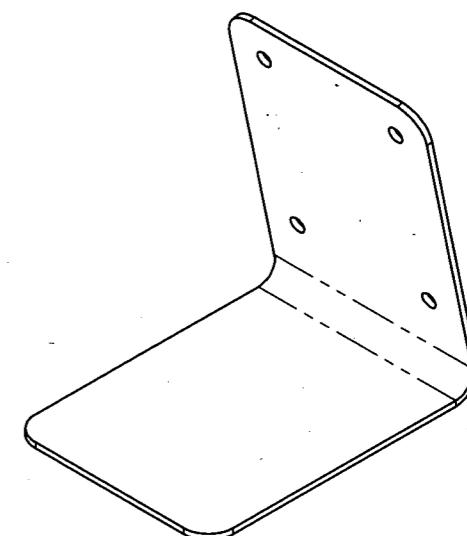


8 7 6 5 4 3 2 1

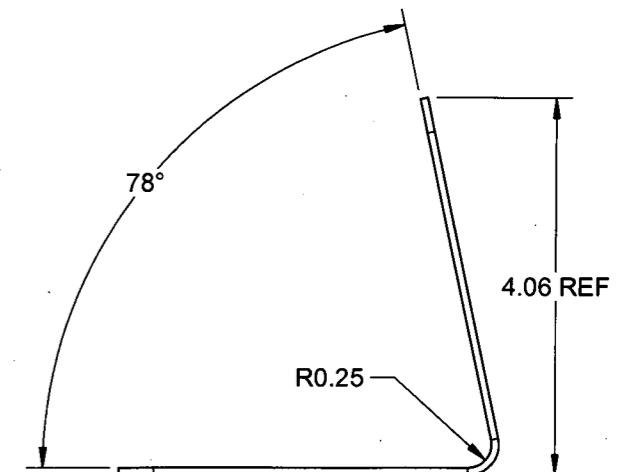

D5025-1F FLAT PATTERN

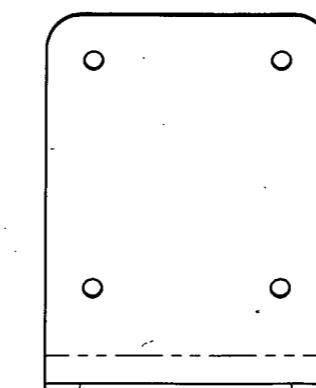

D5025-1 BASE MOUNTING BRACKET
(MAKE FROM D5025-1F)

44 2014-07-23
W

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T62) ALUMINUM SHEET, 0.080 THICK
QQ-A-250/11 OR AMS-QQ-A-250/11 OR AMS 4025 OR AMS 4027 OR ASTM B209
(REF. DART SPEC. M6061T6S.080)
- 2) FINISH: D5025-1: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
POWDER COAT BLACK (4.3.5.7) PER DART QSI 005 4.3
D5025-1F: NONE
- 4) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 5) UNITS: INCHES UNLESS OTHERWISE NOTED
- 6) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 7) IDENTIFICATION: NONE
- 8) WEIGHT: 0.19 LBS

APPROVED

A	NEW ISSUE		DB	13.12.11
REV.	DESCRIPTION		BY	DATE
DESIGN	DB	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA		
DRAWN	DB			
CHECKED	MB		REV. A	
MFG. APPR.	DD		D5025	SHEET 1 OF 1
APPROVED	MP	TITLE		SCALE
DE APPR.	DS	BASE MOUNTING BRACKET		NTS
DATE	14.01.13	COPRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.		